

A3FS (SAE2) Bent Axis Pumps

High Pressure Hydraulic Bent Axis Piston Pumps, High Pressure, 450/500 BAR Working Pressure. High Rotational Speed, High Efficiency, Slim Design, Cast Iron Pump Body, Re-Designed.


Designation;

12cc, 18cc, 25cc, 32cc, 41cc,
50cc, 56cc, 63cc,



Hidrapac **Store**

www.HIDRAPAC.com.tr

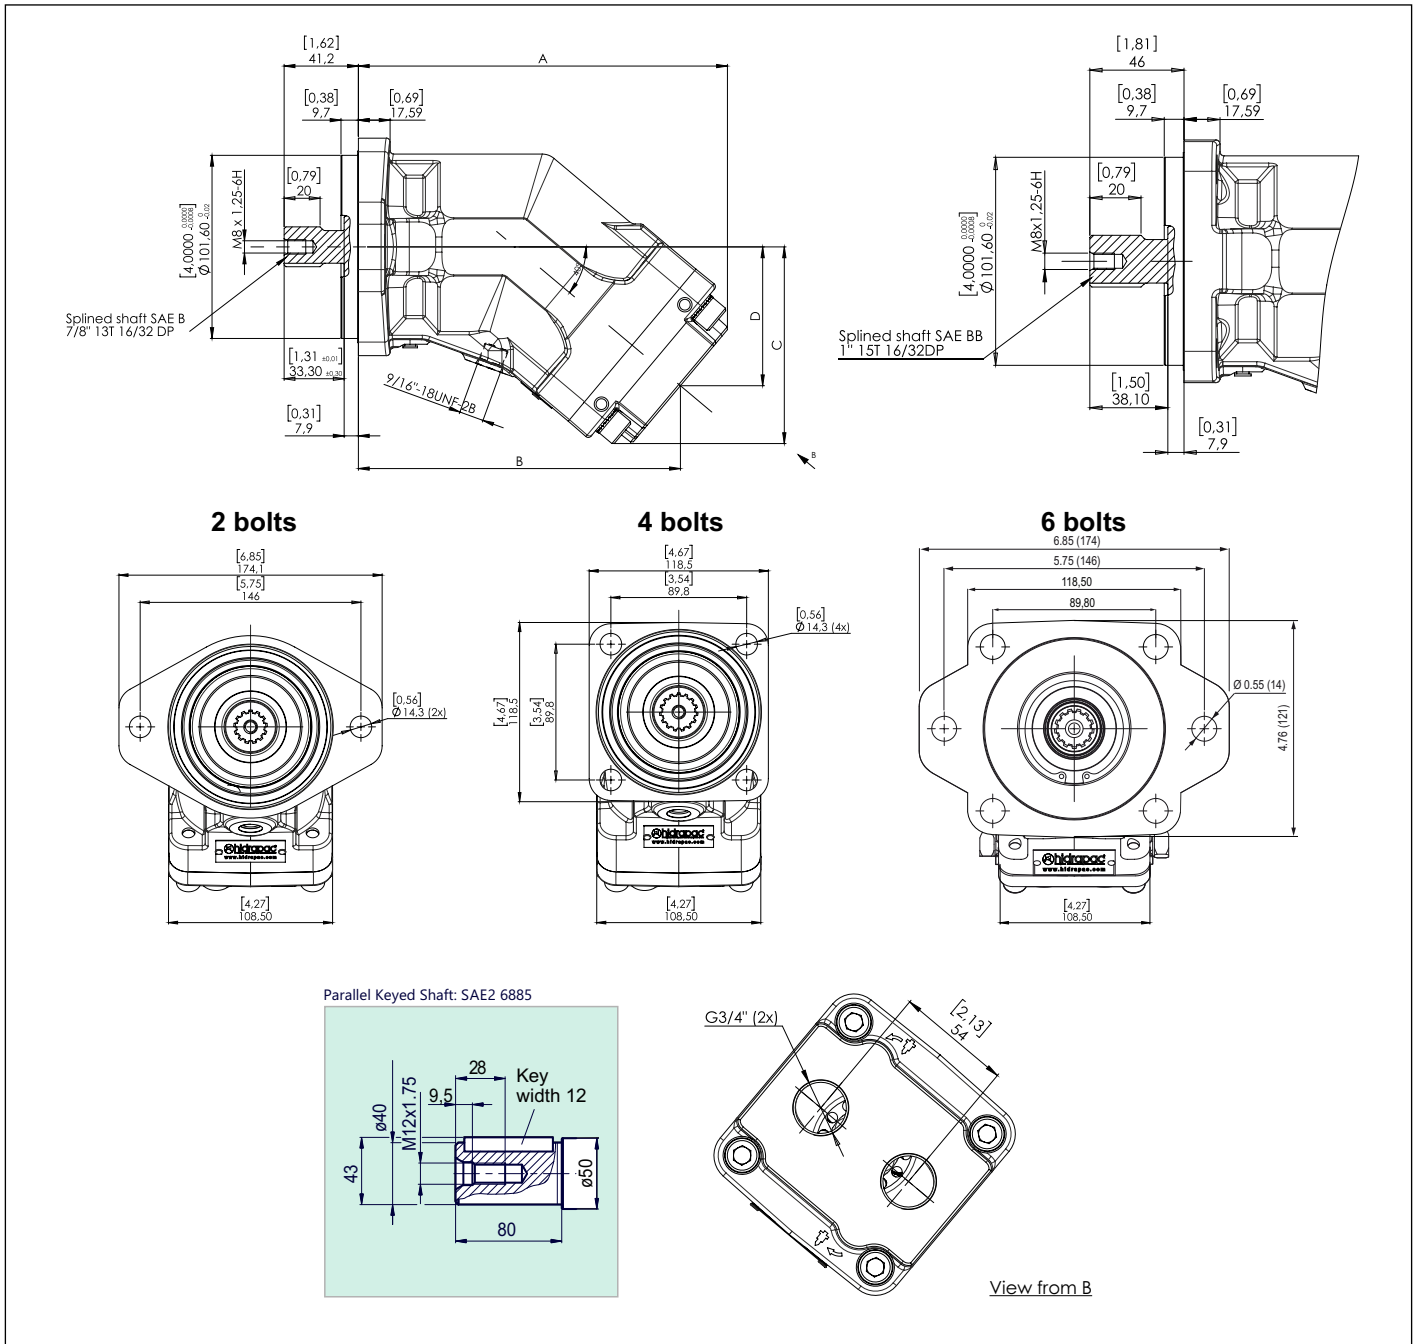


Pump MODEL	DISPL. (cc)	A	B	C	D	SHAFT (SPLINED)	SHAFT (KEYED)
12 cc (SAE J744)	12.1	197.2	172.5	103.7	73.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
18 cc (SAE J744)	18.0	197.2	172.5	103.7	73.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
25 cc (SAE J744)	25.1	197.2	172.5	103.7	73.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
32 cc (SAE J744)	32.0	203.2	178.5	108.7	77.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
41 cc (SAE J744)	41.2	203.2	178.5	108.7	77.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
50 cc (SAE J744)	50.2	214.7	190.0	118.2	86.5	SAE BB 1" 15T-16/32DP	Parallel Keyed Shaft: SAE2 6885
56 cc (SAE J744)	56.0	214.7	190.0	118.2	86.5	SAE BB 1" 15T-16/32DP	Parallel Keyed Shaft: SAE2 6885
63 cc (SAE J744)	63,3	214.7	190.0	118.2	86.5	SAE BB 1" 15T-16/32DP	Parallel Keyed Shaft: SAE2 6885

Characteristics of the A3FS - SAE2 Flange Bent Axis Pumps

Pump MODEL	DISPL. (cc)	CONTINUOUS MAX. SPEED (rpm)	INTERMITTENT MAX. SPEED (rpm)	MAX. FLOW ABSORBED (l/mn)	TORQUE BAR (m.N/bar)	TORQUE AT 350 BAR (m.N)	Pump MAX./MIN. TEMP. (celsius)	MAX. ALLOW PRESSURE CONTN./PEAK (bar)
12 cc	12.1	8000	8800	96	0.19	66	-25 / 110	400 / 450
18 cc	18.0	8000	8800	144	0.28	98	-25 / 110	400 / 450
25 cc	25.1	6300	6900	158	0.40	140	-25 / 110	400 / 450
32 cc	32.0	6300	6900	202	0.50	175	-25 / 110	400 / 450
41 cc	41.2	5600	6200	230	0.65	227	-25 / 110	400 / 450
50 cc	50.2	5000	5500	252	0.80	280	-25 / 110	400 / 450
56 cc	56.0	5000	5500	280	0.90	320	-25 / 110	400 / 450
63 cc	63.3	5000	5500	315	1.00	350	-25 / 110	400 / 450

Direction of Rotation; **Bi-Direcional**


The Pumps rotate clockwise or counter-clockwise depending on the direction of hydraulic flow entering the Pump.

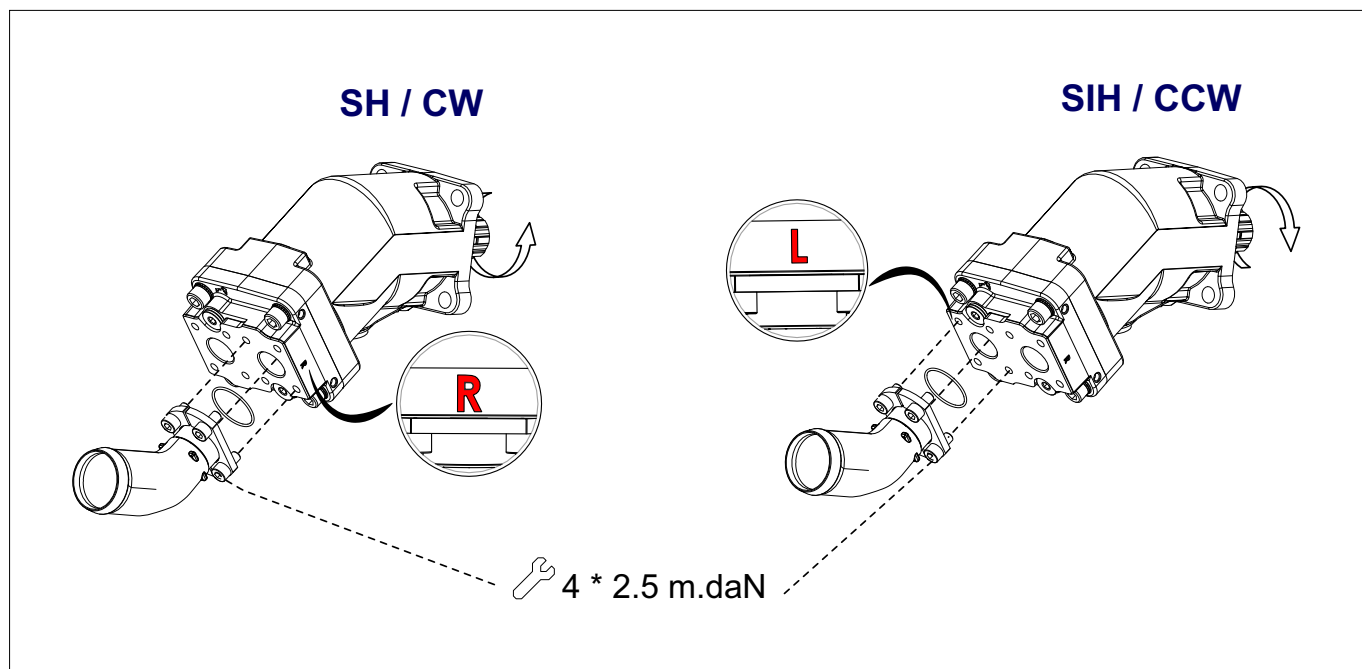



Ordering Code; A3FS - SAE2 Flange Bent Axis Pumps

Model Code	Displacement	Shaft Type	Flange Type	Rotation	Sealing	
A3FS	25	S13	B6	W	V	
A3FS Bent Axis Hydraulic Pump SAE2 Flange	12	S13 Splined Shaft SAE B 7/8" 13T-16/32DP	B2 2 Bolt SAE2 Flange Shaft	W Direction of Rotation Bi-Directional	V Viton High Pressure Seal	
	18					
	25					
	32	S15 Splined Shaft SAE BB 1" 15T-16/32DP	B4 4 Bolt SAE2 Flange Shaft		N Nitrile Seal 5/10 Bar	
	41					
	50					
56	K40 Keyed Shaft SAE2 6885	B6 6 Bolt SAE2 Flange Shaft				
63						

SH / CW




SIH / CCW

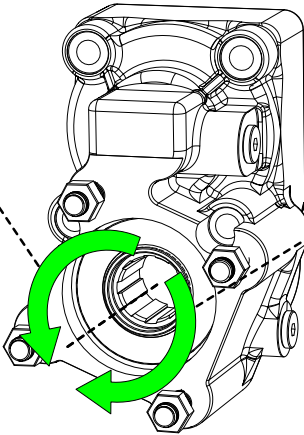


Performance, Torque, Speed and Pressure Charts


Compare Table of Torque

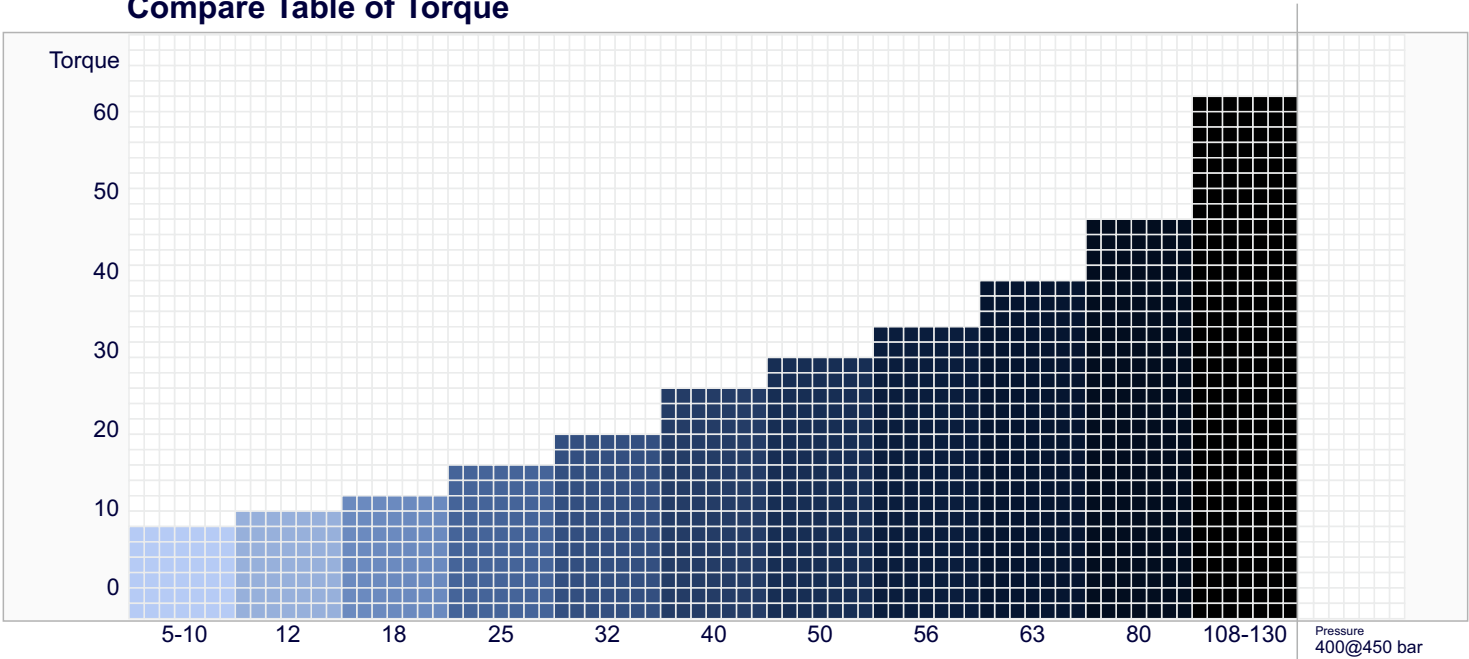

Efficiency of Bent Axis Pumps (1000 rpm)

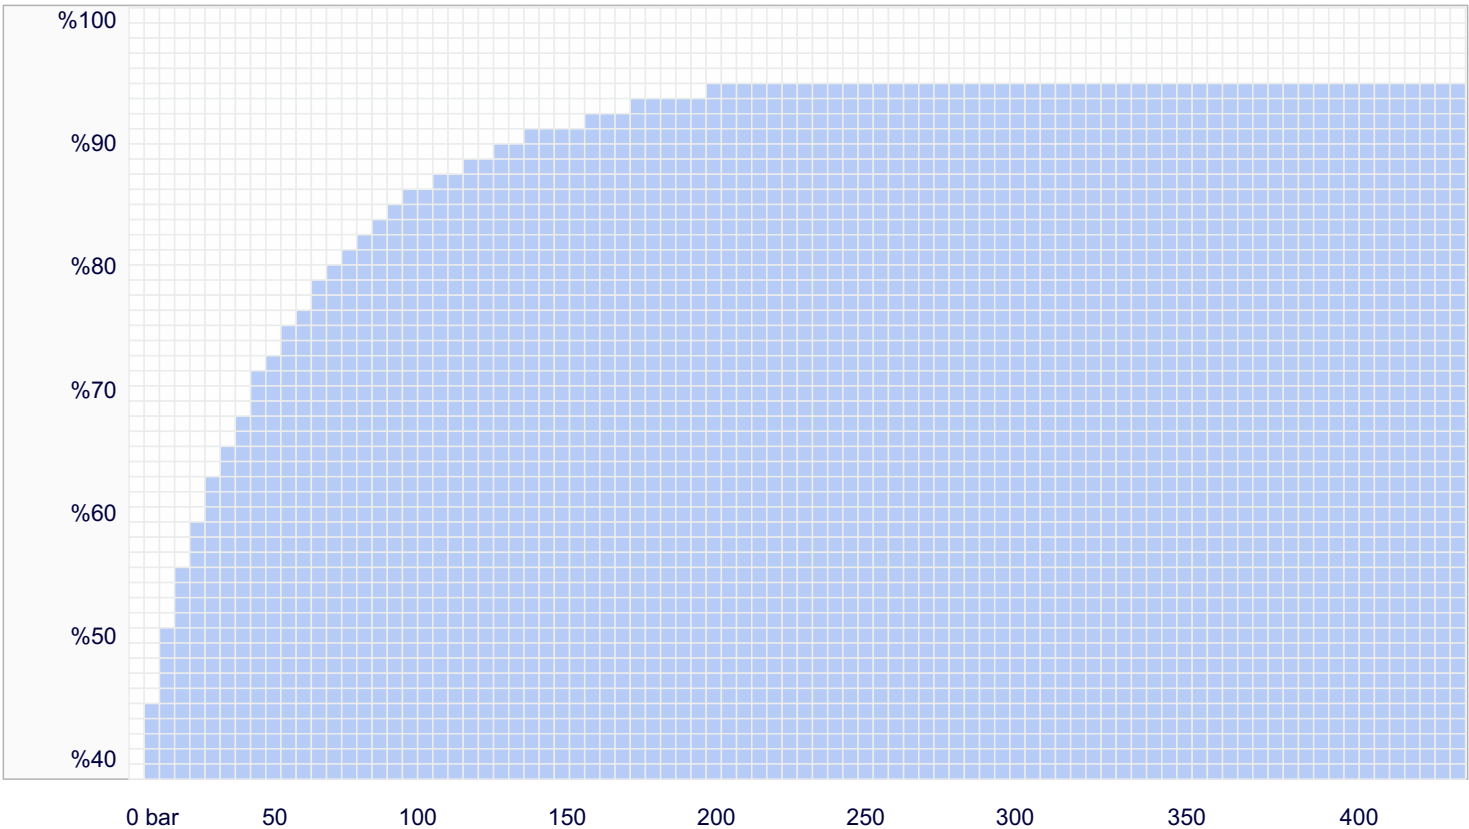

Performance, Torque, Speed and Pressure Charts

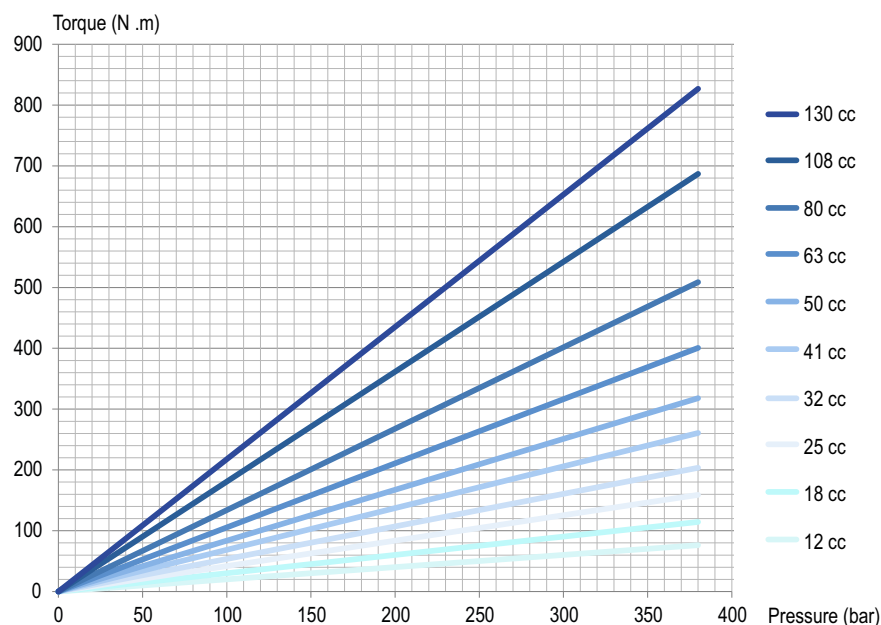


$$C = \frac{\Delta Cyl \times P}{62.8 \times \eta_{meca}}$$

With:

C = Torque in N m
 Cyl = Displacement in cc/rev
 ΔP = Differential pressure in bar
 η_{meca} = Mechanical efficiency


► Flow as a function of rotating speed

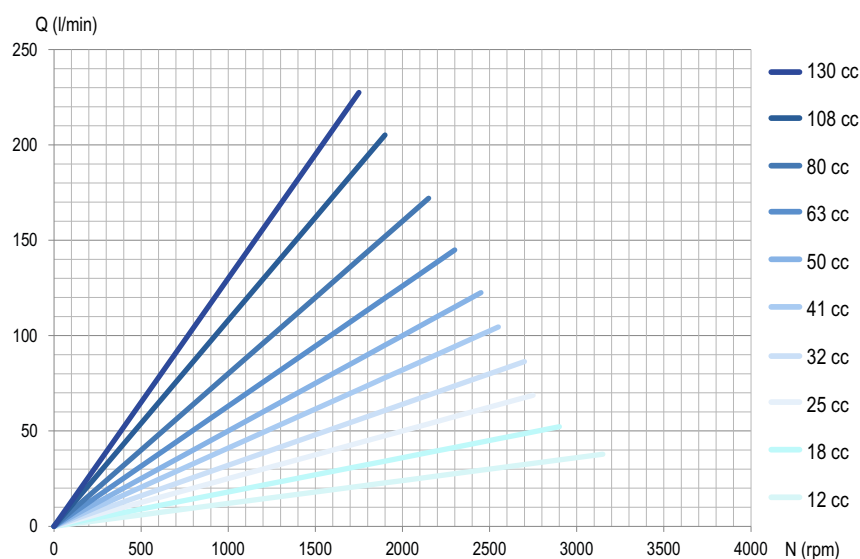

$$Q = \frac{N \times Cyl \times \eta_{vol}}{1000}$$


With:

Q = Flow in l/min
 N = Speed in rpm
 η_{vol} = Volumetric efficiency
 Cyl = Displacement in cc/rev

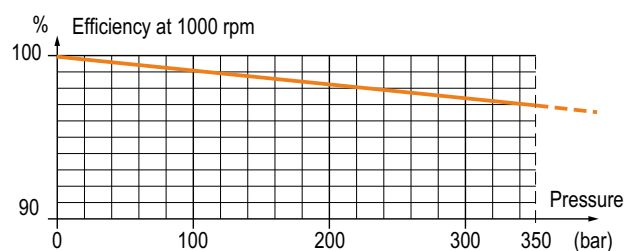


Suction Fittings for A3FS (SAE2) Bent Axis Pumps

45° elbow fittings kit







Reference	Ø hose	Ø A	E	F
450039	1 1/2"	39.1	91.7	46.7
450043	42	43	91.7	46.7
450046	1 3/4"	46	91.7	46.7
450051	2"	51.8	108.4	54.4
450064	2 1/2"	64.5	125.2	62.2

90° elbow fittings kit

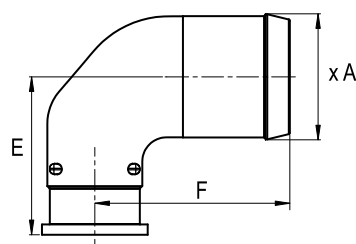

Reference	Ø hose	Ø A	E	F
900039	1 1/2"	39.1	58.6	79.5
900051	2"	51.8	64.9	80.2
900064	2 1/2"	64.5	71.3	87.5

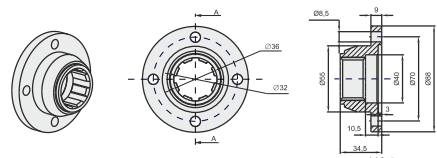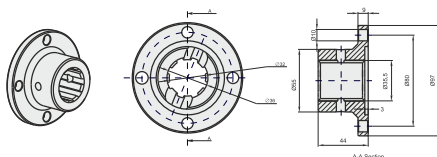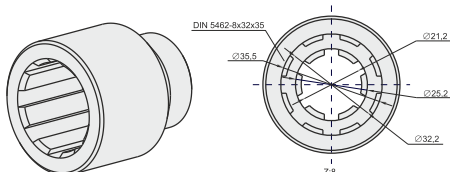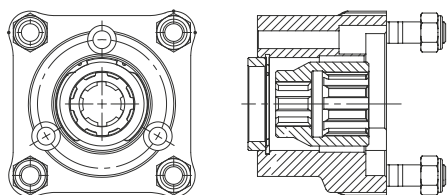

Inlet Fittings & Installation Parts

- Split Flange
- Seal
- Screw



By-Pass Valves

- 12 V
- 24 V



Hydraulic Adapters

- PTO Piston Pump Adapter
- PTO Gear Pump Adapter
- Long / Short Adapter



Flanges


- 1120 (6 Spline)
- 1120 (8 Spline)
- 1300 (6 Spline)
- 1300 (8 Spline)



Couplers


- 6 x 8 Couplar
- 6 x 8 Couplar (Long)
- 8 x 8 Couplar
- 8 x 8 Couplar (Long)

ByPass Valve for A3FS (SAE2) Bent Axis Pumps

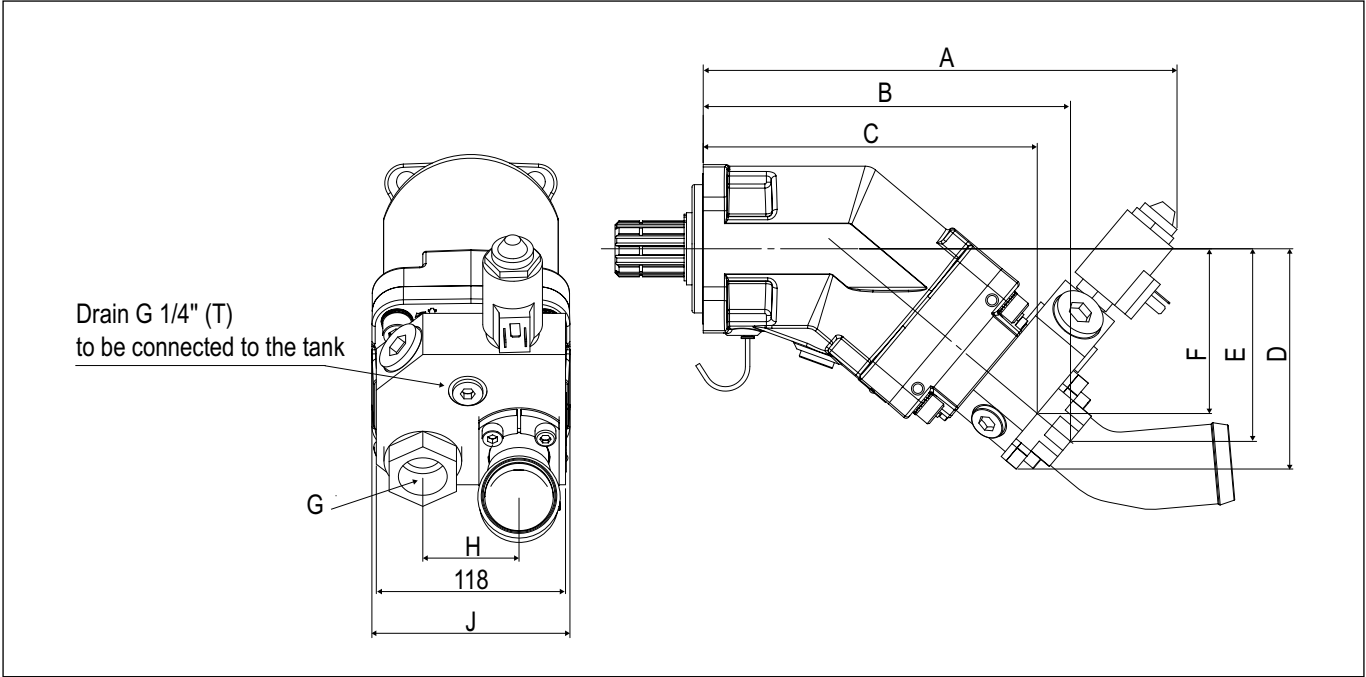

Pump MODEL	DISPL. (cc)	A	B	C	D	E	F	G	H	J
5 cc	5.1	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
10 cc	10.2	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
12 cc	12.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
18 cc	18.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
25 cc	25.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
32 cc	32.0	295.50	229.00	208.30	137.30	120.10	102.70	G 3/4"	54	108
41 cc	41.0	295.50	229.00	208.30	137.30	120.10	102.70	G 3/4"	54	108
50 cc	50,3	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
56 cc	56,0	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
63 cc	63.0	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
80 cc	80,4	334.00	269.00	246.70	157.80	143.90	124.80	G 1"	60	123
108 cc	108	334.00	269.00	246.70	157.80	143.90	124.80	G 1"	60	123
130 cc	130	336.30	271.3	249.00	159.70	145.80	126.70	G 1"	60	123

ByPass Valve for A3FS (SAE2) Bent Axis Pumps

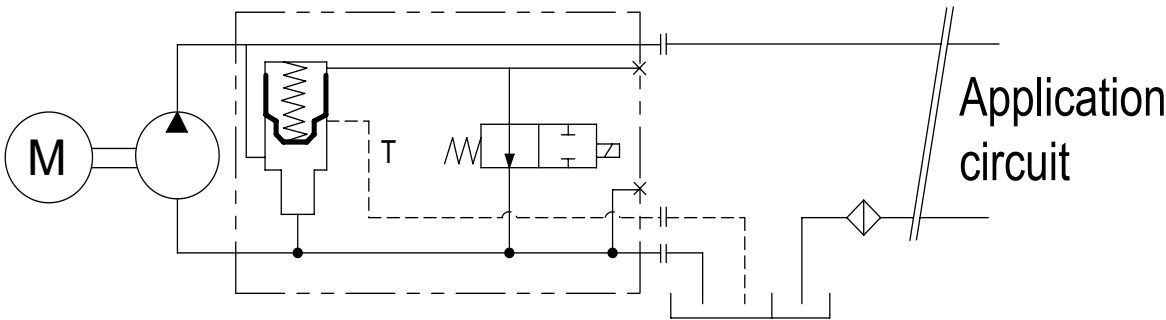

Pump MODEL	DISPL. (cc)	WEIGHT WITHOUT INLET FITTING (kg)	WEIGHT WITH 2" INLET FITTING (kg)	TORQUE WITHOUT FITTING (N.m)	TORQUE WITH FITTING (N.m)
5 cc	5.1	9.00	9.40	8.20	8.60
10 cc	10.2	9.00	9.40	8.65	9.05
12 cc	12.0	9.20	9.60	8.74	9.14
18 cc	18.0	9.30	9.70	8.79	9.19
25 cc	25.0	11.00	11.40	8.89	9.29
32 cc	32.0	11.10	11.50	11.10	11.50
41 cc	41.0	11.20	11.60	11.15	11.55
50 cc	50,3	11.30	11.70	11.75	12.15
56 cc	56,0	11.35	11.75	11.80	12.20
63 cc	63.0	11.45	11.85	11.85	12.25
80 cc	80,4	14.80	15.20	17.80	18.30
108 cc	108	14.90	15.30	17.92	18.42
130 cc	130	15.30	15.70	18.70	19.50

40° bent axis design giving high power, small overall dimensions, optimum efficiency and economic design. Flange and shaft designed for direct mounting on truck gearbox PTO's. The fixed displacement bent axis pumps generates a hydraulic fluid flow. It is designed for use in trucks, commercial vehicles and all stationary hydraulic applications. The Pump a fixed pump with rotary group in bent-axis design open circuits. Flow is proportional to drive speed and displacement.

For axial piston units with bent-axis design, the Pistons are arranged diagonally with respect to the drive shaft. The pump covers the whole displacement range 5 to 130 cm³/rev. The pump has been developed with modern styling and design to satisfy market demand as to designed new generation plate and pistons with give high flow performance, high pressures with high efficiency and very small dimensions.

The pump is available both to SAE2 and SAE world standards and can be mounted either directly at the gear box or via a drive shaft. If necessary it can also be augmented with a by-pass valve. Other brand bent axis pumps compatible and interchangeable with SAE2 bent axis pumps. Refer to the data sheet and order confirmation for the technical data, operating conditions and operating limits of the bent axis piston pumps.

Formulas			
Pump Output Flow	GPM	$GPM = (\text{Speed (rpm)} \times \text{disp. (cu. in.)}) / 231$	$GPM = (n \times d) / 231$
Pump Input Horsepower	HP	$HP = GPM \times \text{Pressure (psi)} / 1714 \times \text{Efficiency}$	$HP = (Q \times P) / 1714 \times E$
Pump Efficiency	E	Overall Efficiency = Output HP / Input HP	E _{Overall} = HP _{Out} / HP _{In} X 100
		Overall Efficiency = Volumetric Eff. × Mechanical Eff.	E _{Overall} = Eff _{Vol.} × Eff _{Mech.}
Pump Volumetric Efficiency	E	Volumetric Efficiency = Actual Flow Rate Output (GPM) / Theoretical Flow Rate Output (GPM) × 100	Eff _{Vol.} = Q _{Act.} / Q _{Theo.} X 100
Pump Mechanical Efficiency	E	Mechanical Efficiency = Theoretical Torque to Drive / Actual Torque to Drive × 100	Eff _{Mech} = T _{Theo.} / T _{Act.} × 100
Pump Displacement	CIPR	Displcmnt (In. ³ / rev.) = Flow Rate (GPM) × 231 / Pump RPM	CIPR = GPM × 231 / RPM
Pump Torque	T	Torque = Horsepower × 63025 / RPM	T = 63025 × HP / RPM
		Torque = Pressure (PSIG) × Pump Displacement (CIPR) / 2π	T = P × CIPR / 6.28

- Horsepower for driving a pump** : For every 1 hp of drive, the equivalent of 1 gpm @ 1500 psi can be produced.
- Horsepower for idling a pump** : To idle a pump when it is unloaded will require about 5% of it's full rated power
- Wattage for heating hydraulic oil** : Each watt will raise the temperature of 1 gallon of oil by 1° F. per hour.
- Flow velocity in hydraulic lines** : Pump suction lines 2 to 4 feet per second, pressure lines up to 500 psi - 10 to 15 ft./sec., pressure lines 500 to 3000 psi - 15 to 20 ft./sec.; all oil lines in air-over-oil systems; 4 ft./sec.

Hydraulic Pumps



K2FA (DIN)

BENT AXIS PISTON PUMPS



K2FL (DIN)

ALUMINUM BODY
BENT AXIS PISTON PUMPS



A2FD (DIN)

DUAL FLOW
BENT AXIS PISTON PUMPS



A2FO (ISO)

BENT AXIS PISTON PUMPS



A2FS (SAE)

BENT AXIS PISTON PUMPS



AXVP Series

VARIABLE DISPLACEMENT
PISTON PUMPS



A3PP Series

AXIAL PISTON PUMPS



A3PH Series

HIGH PRESSURE
PISTON PUMPS



ByPass Valve

FOR
BENT AXIS PISTON PUMPS



LS Adapters

FOR
VARIABLE PISTON PUMPS

Hydraulic Motors



K2FM (DIN)

BENT AXIS PISTON MOTORS



A2FM (ISO)

BENT AXIS PISTON MOTORS



A2MS (SAE)

BENT AXIS PISTON MOTORS



A2FE (FixedPlug)

BENT AXIS PISTON MOTORS



Anti Cavitation

VALVE
BENT AXIS PISTON MOTORS


ByPass Valve

for Bent Axis Piston Pumps



LS Adapter

for Variable Displacement Piston Pump

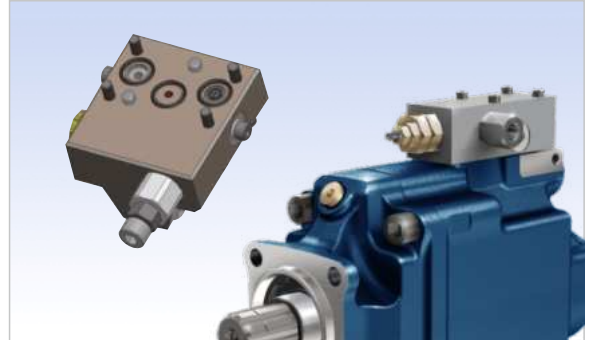

Suction Fittings

for Bent Axis Piston Pumps



Flushing Valve

for Bent Axis Piston Motors



Adapter

for Bent Axis Piston Pumps



Flange, Couplar

for Bent Axis Piston Pumps



Hydraulic Pumps, Hydraulic Motors

Bent Axis Hydraulic Piston Pumps, Bent Axis Piston Motors,
Dual Flow Hydraulic Piston Pumps, Variable Displacement Piston Pumps,
High Pressure Piston Pumps, Straight Axial Piston Pumps..



Address;

HIDRAPAC HYDRAULIC PUMP & MOTORS

Address; (PRODUCTION)

Fevzicakmak Mah. Sila Cad. Kobisan 3 San. Sit.
No: 73 / C Karatay – Konya, PO Code; 42050, Turkiye

Address; (ASSEMBLE, SHIPMENT)

Fevzicakmak Mah. Sila Cad. Kobisan 3 San. Sit.
No: 71 / AD Karatay – Konya, PO Code; 42050, Turkiye

Phone; +90 551 111 77 44